

## IMS-bearing assembly

This kit covers replacement of both narrow and wide IMS bearings and fits all 996 and 986 Boxster models. Full CrMo construction, custom high precision ball bearing and an upgraded gasket for improved leak protection.

### INSTALLATION NOTES:

When replacing a stock wide (two row) bearing, use both the spacer ring and the narrow locking (spiral type ring). Spacer ring is installed after the bearing.


When replacing a stock narrow (one row) bearing, use the wide locking (DIN 472 type) without the spacer ring.

### TORQUE SPECIFICATIONS:

- M6 bracket mounting bolts - 10Nm
- M10 center nut - 15Nm (use threadlocker for extra security)

### WARRANTY:

Our IMS bearing assembly comes with a 2 year or 40,000km warranty when the installation has been done as preventative maintenance.

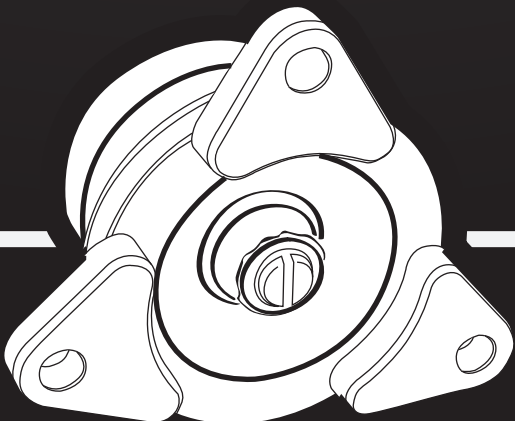

9P-IMS-3RV  
[www.9products.com](http://www.9products.com)